





Jenstack Max Twin 450-500


High-capacity compact
large piece stacker

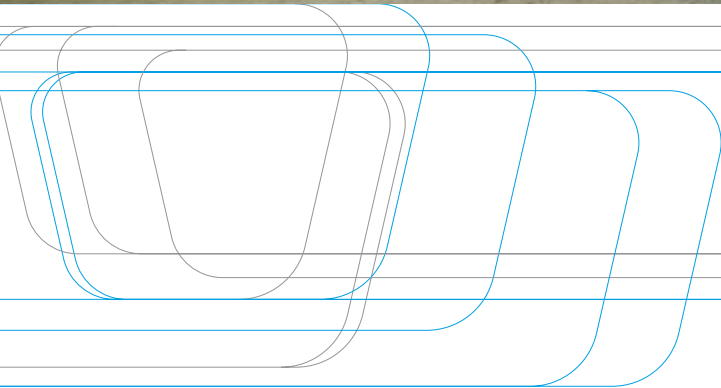

Jenstack Max Twin 450-500

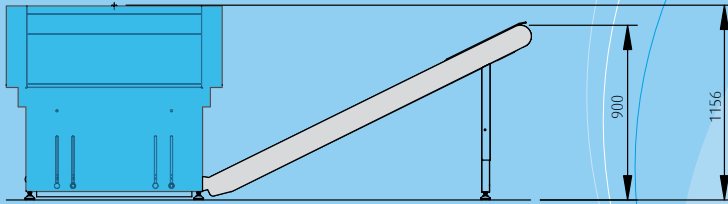

Side view

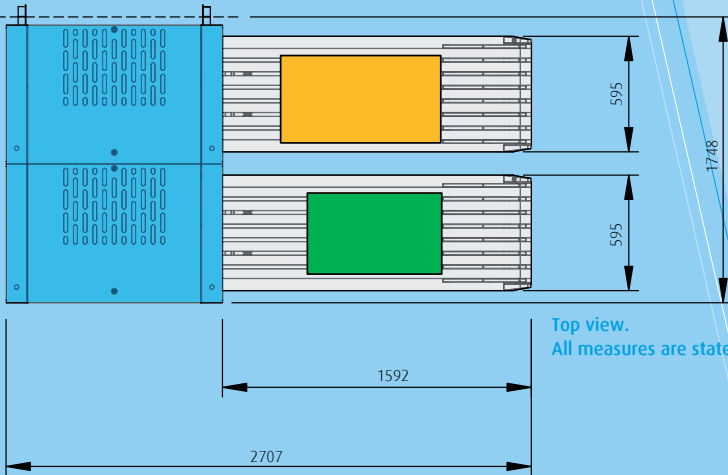

Max. linen size:

Stacker 1: 450 x 830 mm.

Stacker 2: 500 x 830 mm.

Max. stacking height: 300 mm.

Stacking features:

- by turn
- by lane (lane one goes to stacker one)
- by length (linen exceeding a preset length goes to stacker two)

Optional stacker sortings possible.



Application

The optimum solution for space-saving, high-speed stacking of thick and thin linen. When you use the Max Twin 450-500 stacker, linen can be sorted and stacked according to linen size and predetermined categories controlled by the folders' PLC.

Operation

The folded linen arrives from the crossfolder and stops on top of two flaps which open rapidly dropping the linen onto the stack. When the pre-selected number has been reached the stack is ejected to a delivery conveyor.

Features

The delivery conveyor is supplied with a drum motor giving a smooth and steady transport of the stacks. The Inlet on the stacker is spring mounted in order to secure a uniform and good stacking quality of thick as well as thin linen.

Models/capacity

Integrated Twin stackers
controlled by the folders' PLC.

Max. capacity: up to 1600 pieces per hour.

Installation

JENSEN is pleased to assist you in planning your laundry providing excellent consulting, layouts and technical data. Authorized JENSEN distributors or JENSEN engineers should carry out the installation to ensure the correct performance.

Service

In addition JENSEN provides an extraordinary after sales service through a worldwide network of highly qualified Sales and Service Centers and distributors, all with their own maintenance and spare parts services.

Call us...

JENSEN provides a complete range of heavy-duty equipment for the laundry industry, delivered and installed according to your specifications. Please do not hesitate to contact us for further advice and information, or visit www.jensen-group.com

Local contact